


PYRP310-XA (蠕动泵)

蠕动泵
LIQUID PUMP

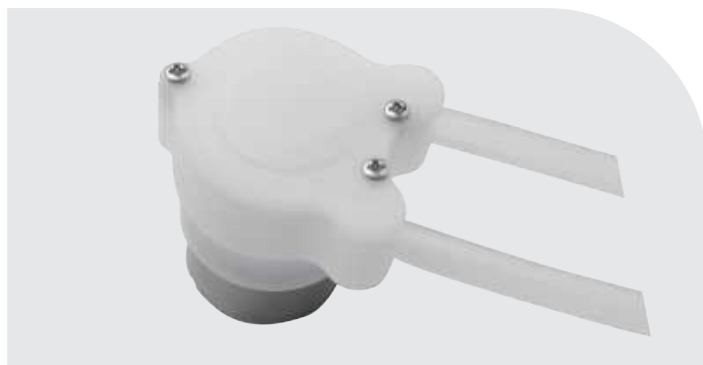

典型应用 Typical Applications




Home appliances, medical, beauty, massage, adult products
家用电器.医疗.美容.按摩.成人用品.

Hand sanitizer foaming machine
洗手液发泡机

外形尺寸

Dimension

WEIGHT:42.0g(APPROX)
UNIT:MILLIMETERS

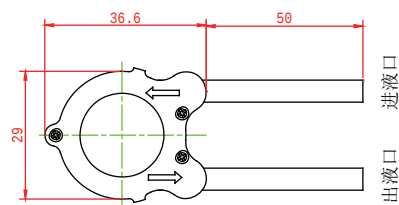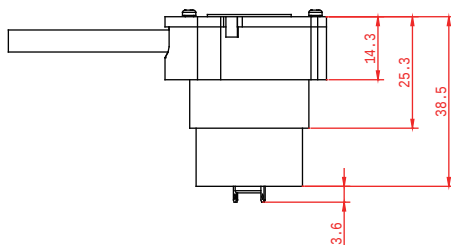

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V
额定电流	Rated Current	≤ 1000mA	≤ 810mA	≤ 660mA	≤ 500mA
功率	Power	3.0 W	3.0 W	3.0 W	3.0 W
气嘴口径	Air Tap O.D.	Ø5.0mm			
抽液量	Water flow	50-200 mLPM			
最大真空度	Maximum Vacuum	≤ -20 Kpa(-150mmHg)			
噪音	Noise Level	≤ 65db (30cm away)			
寿命测试	Life Test	≥ 100,000 Times (ON 2秒, OFF 2秒)			
扬程	Pump Head	≥ 0.5m			
吸程	Suction Head	≥ 0.5m			
重量	Weight	42g			

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYRP310-XA (无刷蠕动泵)

蠕动泵

LIQUID PUMP



典型应用 Typical Applications


Home appliances, medical, beauty, massage, adult products
家用电器.医疗.美容.按摩.成人用品.

Hand sanitizer foaming machine
洗手液发泡机

外形尺寸

Dimension

WEIGHT:42.0g(APPROX)
UNIT:MILLIMETERS

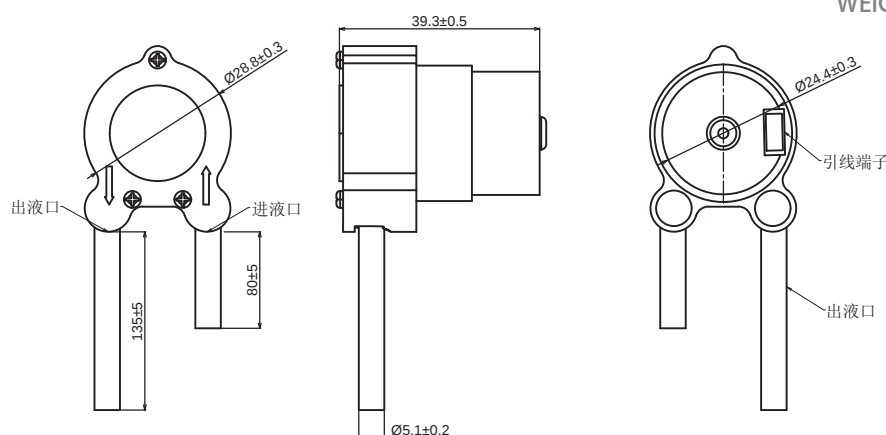

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V
额定电流	Rated Current	≤1000mA	≤810mA	≤660mA	≤500mA
功率	Power	3.0 W	3.0 W	3.0 W	3.0 W
气嘴口径	Air Tap O.D.	Ø5.0mm			
抽液量	Water flow	50-200 mLPM			
最大真空度	Maximum Vacuum	≤-20 Kpa(-150mmHg)			
噪音	Noise Level	≤65db (30cm away)			
寿命测试	Life Test	≥ 100,000 Times (ON 2秒, OFF 2秒)			
扬程	Pump Head	≥0.5m			
吸程	Suction Head	≥0.5m			
重量	Weight	42g			

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.

PYRP500-XA (蠕动泵)

蠕动泵
LIQUID PUMP




典型应用 Typical Applications

- Home appliances, medical, beauty, massage, adult products
家用电器.医疗.美容.按摩.成人用品.
- Hand sanitizer foaming machine
洗手液发泡机

外形尺寸

Dimension

WEIGHT:56.0g(APPROX)
UNIT:MILLIMETERS

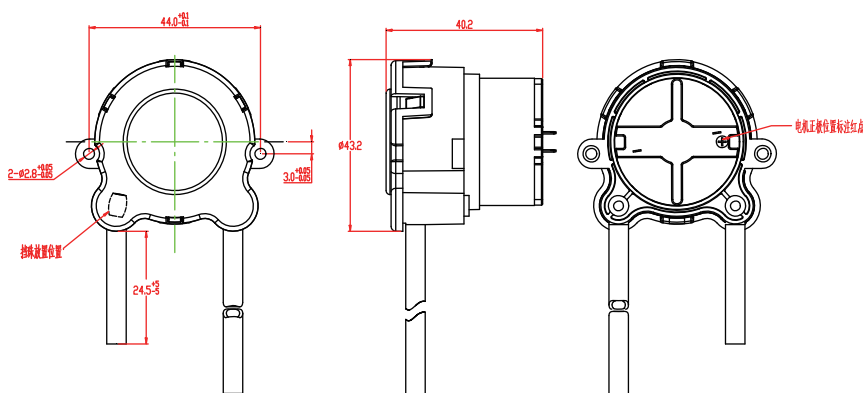

产品规格

Product Specifications

额定电压 Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V	DC 12V
额定电流 Rated Current	≤800mA	≤650mA	≤530mA	≤400mA	≤200mA
功率 Power	2.4 W	2.4 W	2.4 W	2.4 W	
气嘴口径 Air Tap O.D.	Ø5.0mm				
抽液量 Water flow	100-300 mLPM				
最大真空度 Maximum Vacuum	≤ -20 Kpa(-150mmHg)				
噪音 Noise Level	≤65db (30cm away)				
寿命测试 Life Test	≥ 100,000 Times (ON 2秒, OFF 2秒)				
扬程 Pump Head	≥0.5m				
吸程 Suction Head	≥0.5m				
重量 Weight	56g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.

PYRP350-XA (350蠕动泵)

蠕动泵

LIQUID PUMP



典型应用 Typical Applications

Care and beauty products

洗护用品、美容用品.

Hand washing machine, disinfectant machine




洗手液机、消毒液机

外形尺寸

Dimension

WEIGHT:50.0g(APPROX)

UNIT:MILLIMETERS

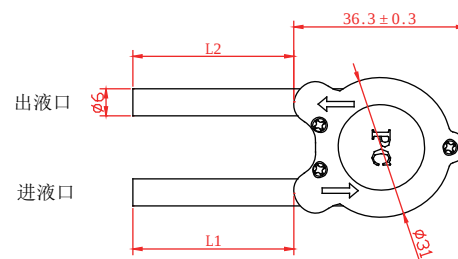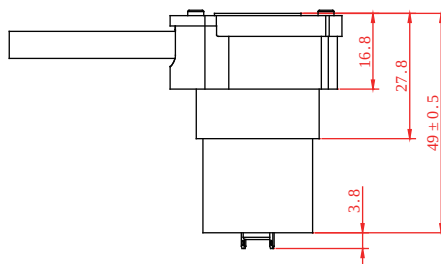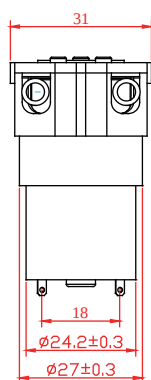

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V
额定电流	Rated Current	≤800mA	≤700mA	≤600mA	≤400mA
功率	Power	2.4 W	2.4 W	2.4 W	2.4 W
气嘴口径	Air Tap O.D.	Ø6.0mm			
抽液量	Water flow	150-200 mLPM			
最大真空度	Maximum Vacuum	≤-20 Kpa(-150mmHg)			
噪音	Noise Level	≤65db (30cm away)			
寿命测试	Life Test	≥ 100,000 Times (ON 2秒, OFF 2秒)			
扬程	Pump Head	≥0.5m			
吸程	Suction Head	≥0.5m			
重量	Weight	50g			

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.

PYRP520-XA (520蠕动泵)

蠕动泵
LIQUID PUMP




典型应用 Typical Applications

- ▶ Toiletries, beauty products, medical equipment, cleaning appliances
洗护用品、美容用品、医疗设备、清洁家电等。
- ▶ floor brush, floor mop, floor sweeping robot
地刷、地拖、扫地机器人

外形尺寸

Dimension

WEIGHT:100.0g(APPROX)
UNIT:MILLIMETERS

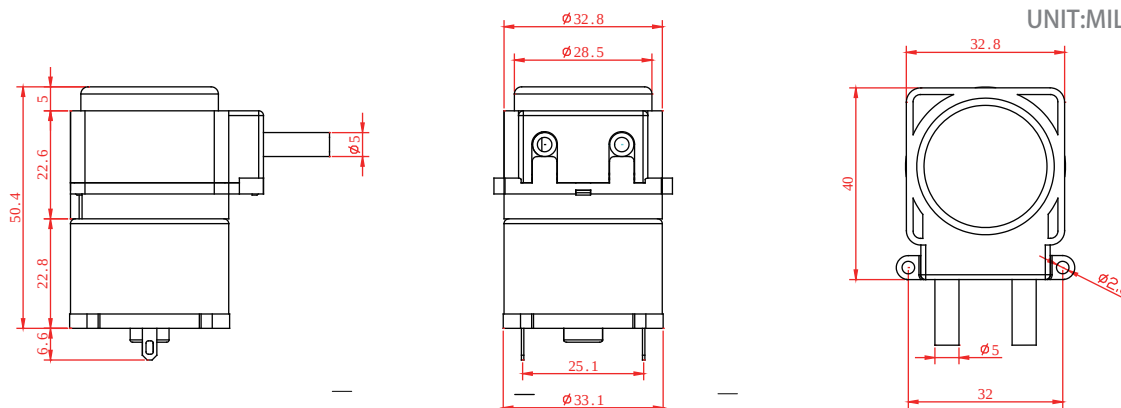

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V	DC 12V
额定电流	Rated Current	≤ 1000mA	≤ 800mA	≤ 650mA	≤ 500mA	≤ 250mA
功率	Power	3.0 W	3.0 W	3.0 W	3.0 W	
气嘴口径	Air Tap O.D.	Ø3.0mm				
抽液量	Water flow	200-300 mLPM				
最大真空度	Maximum Vacuum	≤ -20 Kpa(-150mmHg)				
噪音	Noise Level	≤ 65db (30cm away)				
寿命测试	Life Test	≥ 500 hours (连续工作)				
扬程	Pump Head	≥ 30m				
吸程	Suction Head	≥ 30m				
重量	Weight	100g				

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计。

PYRPN20-XA (蠕动泵)

蠕动泵

LIQUID PUMP




典型应用 Typical Applications

Home appliances, medical, beauty, massage, adult products
家用电器.医疗.美容.按摩.成人用品.

外形尺寸

Dimension

WEIGHT:13g(APPROX)
UNIT:MILLIMETERS

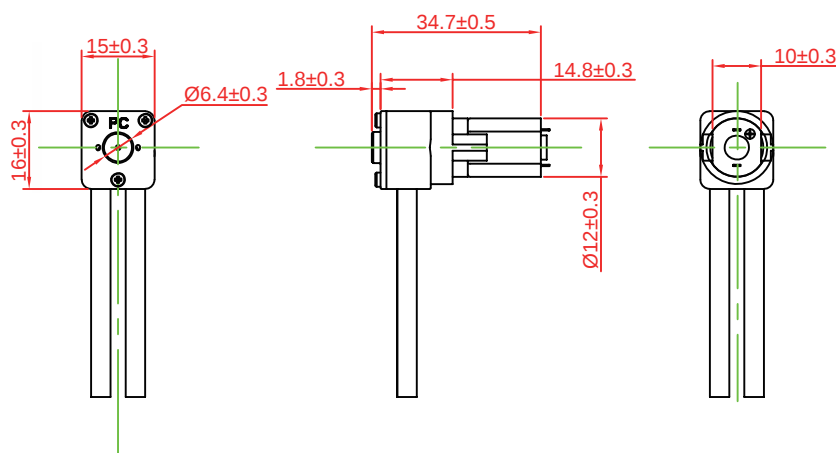

产品规格

Product Specifications

额定电压	Rated Voltage	DC 3V	DC 3.7V	DC 4.5V	DC 6V
额定电流	Rated Current	≤ 150mA	≤ 120mA	≤ 100mA	≤ 80mA
功率	Power	0.45 W	0.45 W	0.45 W	0.45 W
气嘴口径	Air Tap O.D.	Ø4.0mm			
最大水压	Maximum Water Pressure	≤ -20Kpa (-150mmhg)			
水流量	Water flow	0.5-5.0 mLPM			
噪音	Noise Level	≤ 45db (30cm away)			
寿命测试	Life Test	≥ 20,000Times (ON 2秒, OFF 2秒) 或 ≥ 100小时			
扬程	Pump Head	≥ 0.5m			
吸程	Suction Head	≥ 0.5m			
重量	Weight	13g			

* Other parameters: according to customer demand for design/其他参数：根据客户的需求设计.

75

SHENZHEN PINCHENG MOTOR CO.,LTD
http://www.pinchengmotor.com Tel: +86-755-2879 9949 Fax: +86-755-2879 9811

F